

**Ceratherm Central  
Thermostatic Valve**  
2050.110

**"Sport"  
Showerhead**  
1660.100

**(3) "Sport" Body/Side  
Sprays**  
1660.120


**On/Off 1/2" Valve**  
7001.000

**On/Off 3/4" Valve**  
7011.000

**Set of Lever  
Handles**  
0000.342H




### Suggested Dimensions:

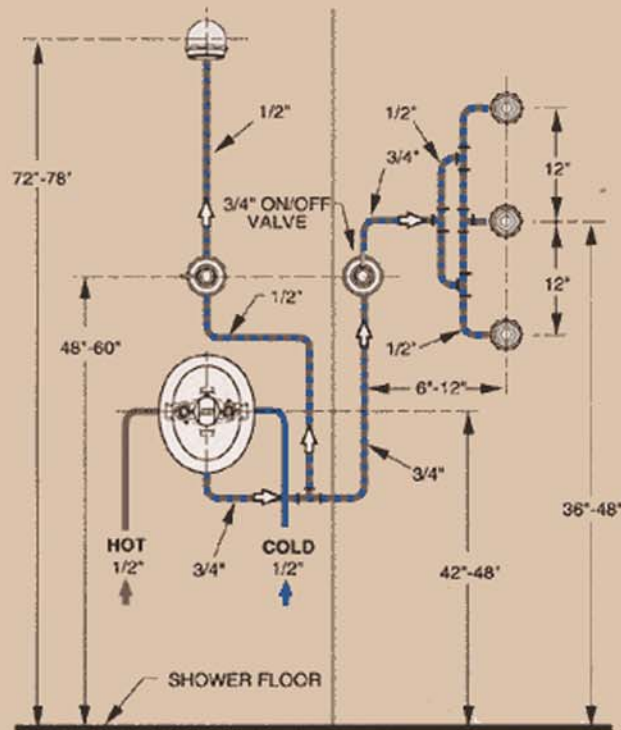

### Technical Notes:

- Plug unused outlet port.
- Minimum flowing pressure required for this system operating with Showerhead and 3 Body/Side Sprays in fine mode is 45 psi.


**Ceratherm**  
**2-Handle Valve**  
 2050.111  
**"Massage"**  
**Showerhead**  
 1660.702  
**"3 Function"**  
**Handshower**  
 1660.503  
**Hose**  
 8888.035  
**Wall Supply**  
 8888.037  
**(3) Trevi**  
**Deluxe**  
**Body/Side**  
**Sprays**  
 1660.125  
**On/Off**  
**Valve**  
 7011.490  
**Two-Way**  
**Diverter**  
 1660.440

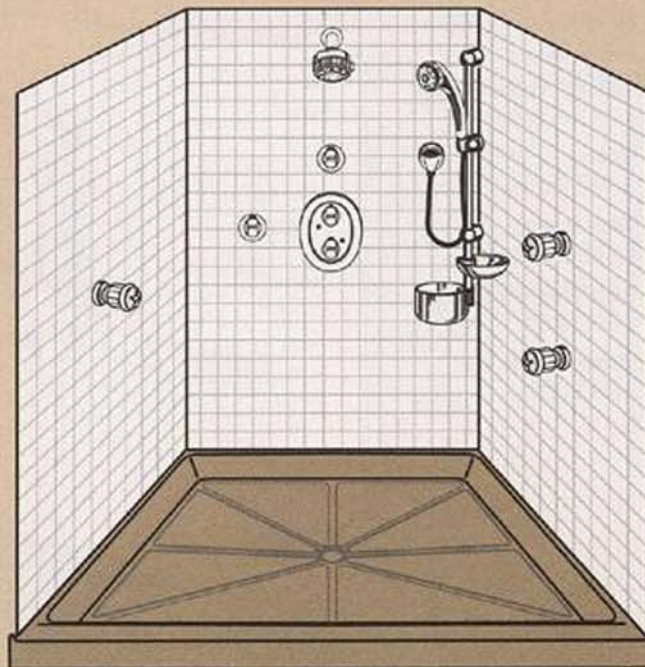

**Deluxe**  
**Slide Bar**  
 1660.232

**Corner Mounting**  
**Brackets**  
 030787-YYY0A

### Suggested Dimensions:

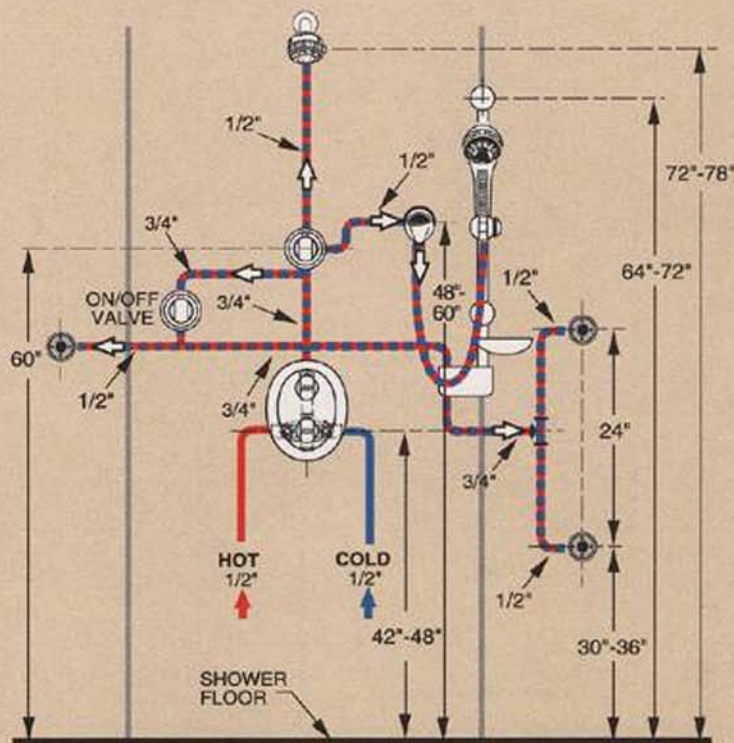

### Technical Notes:

- Tub port must be plugged.
- Piping to body/side sprays should be balanced to provide even spray patterns.
- Minimum flowing pressure required for this system operating with Showerhead or Handshower and 3 Body/Side Sprays in fine mode is 45 psi.

**Ceratherm  
2-Handle  
Thermostatic  
Valve**  
2050.210

**"Trevi" Deluxe  
Showerhead**  
1660.115

**"Trevi" Deluxe  
Handshower**  
1660.525

**Hose**  
8888.035


**Wall Supply**  
8888.037

**(4) "Sport"  
Body/Side  
Sprays**  
1660.120


**3-Way Diverter**  
1660.430

**Deluxe Slide Bar**  
1660.232

**Corner Mounting Brackets** 030787-YYY0A

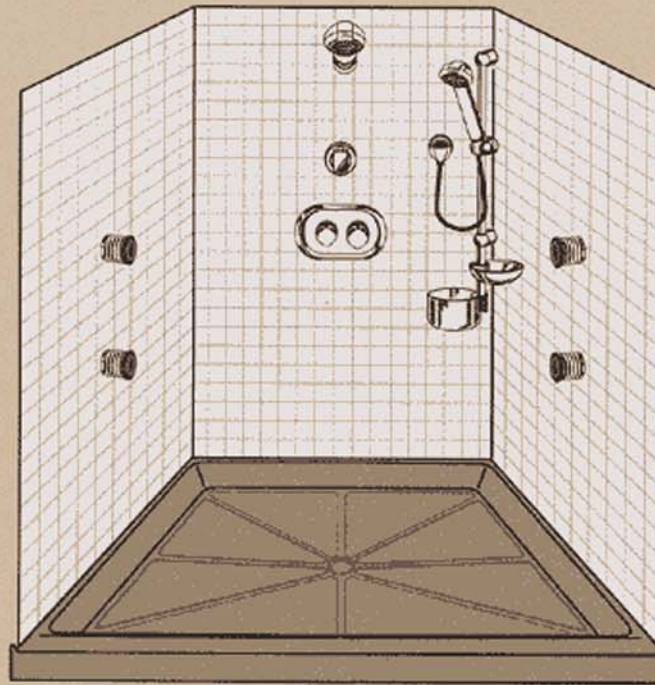

### Suggested Dimensions:

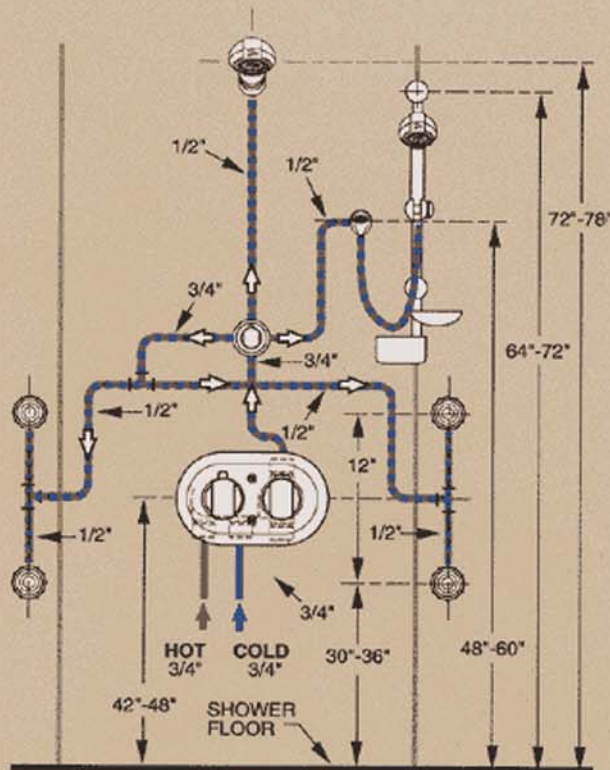

### Technical Notes:

- Plug unused outlet port.
- Piping to body/side sprays should be balanced to provide even spray patterns.
- Minimum flowing pressure required for this system operating with Showerhead or Handshower or 4 Body/Side Sprays in fine mode is 40 psi.

